

Company: \_\_\_\_\_

\_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

Contact person: \_\_\_\_\_



Telephone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

Quantity: \_\_\_\_\_

Delivery date: \_\_\_\_\_

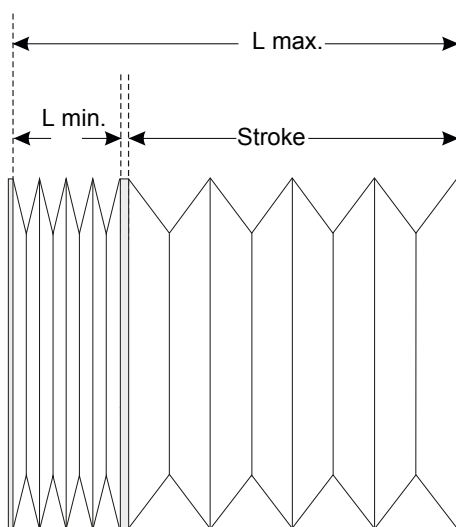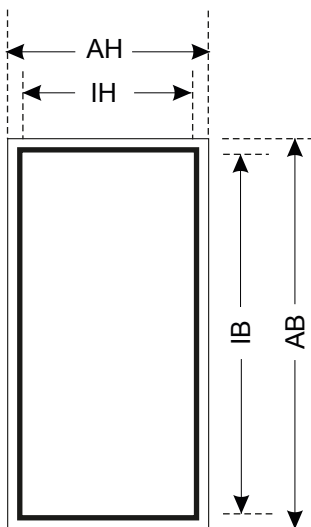

## Operating conditions:

- ☐ Interior
- ☐ Exterior
- ☐ Spray water
- ☐ Heat, Temp. \_\_\_\_\_°C
- ☐ Coolant, Type \_\_\_\_\_
- ☐ Oil, Type \_\_\_\_\_
- ☐ Acids
- ☐ Alkaline
- ☐ Welding spray
- ☐ Dust, sand
- ☐ Shavings, Temp. \_\_\_\_\_°C

## Dimension:

|                  |    |   |          |
|------------------|----|---|----------|
| Exterior width   | AB | = | _____ mm |
| External width   | AH | = | _____ mm |
| Interior width   | IB | = | _____ mm |
| Internal height  | IH | = | _____ mm |
| Side height      | SH | = | _____ mm |
| max. extension   | ZD | = | _____ mm |
| min. compression | ZD | = | _____ mm |
| Fold width       | FB | = | _____ mm |

## Installation:


- ☐ Horizontal
- ☐ Vertical
- Angle \_\_\_\_\_°

## Attachmentvariants


Examples):

- ☐ Metal-Frame
- ☐ Velcro-strip


### 1. End frame prefixed



### 2. Flange fill fold



### 3. Velcro strip



## Load:

Speed  
max. speed/min \_\_\_\_\_  
Number of strokes \_\_\_\_\_