

# Bellow

DATASHEET  Enquiry  Order

Company: \_\_\_\_\_

\_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

Contact person: \_\_\_\_\_


Telephone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

Quantity: \_\_\_\_\_

Delivery date: \_\_\_\_\_

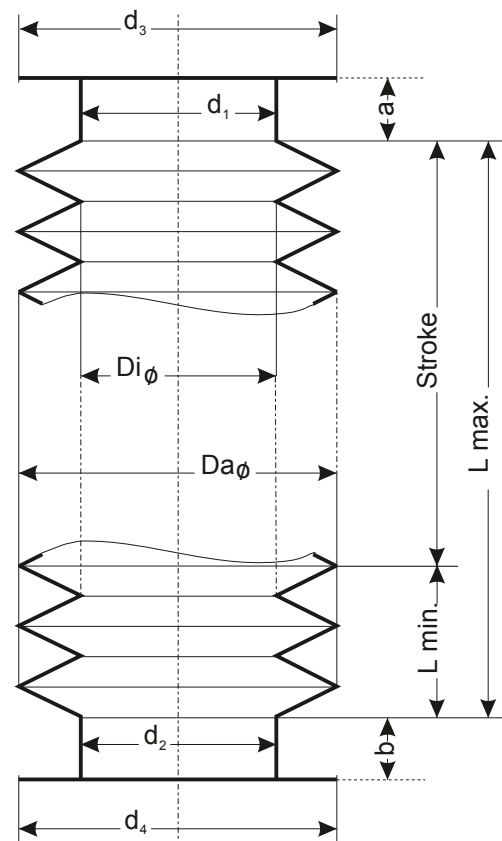

### Dimension in mm:

$Di$  \_\_\_\_\_  
 $Da$  \_\_\_\_\_  
 $L \text{ max.}$  \_\_\_\_\_  
 $L \text{ min.}$  \_\_\_\_\_  
 $\text{Stroke}$  \_\_\_\_\_

### Insert:

Spindle \_\_\_\_\_  $\emptyset$   
 Shaft \_\_\_\_\_  $\emptyset$   
 \_\_\_\_\_

### Design:

Closed  
 Divisible:  
 Velcro fastener  
 Zipper fastener

### Connection:

$d_1$  \_\_\_\_\_  $a$  \_\_\_\_\_  
 $d_2$  \_\_\_\_\_  $b$  \_\_\_\_\_

### Installation:

Horizontal  
 Vertical  
 Angle \_\_\_\_\_  $^\circ$

### Load:

Speed  
 max. speed/min \_\_\_\_\_  
 Number of strokes \_\_\_\_\_

### Flange:

$d_3$  \_\_\_\_\_  
 $d_4$  \_\_\_\_\_

### Operating conditions:

Interior  
 Exterior  
 Spray water  
 Heat, Temp. \_\_\_\_\_  $^\circ\text{C}$   
 Coolant, Type \_\_\_\_\_  
 Oil, Type \_\_\_\_\_  
 Acids  
 Alkaline  
 Welding spray  
 Dust, sand  
 Shavings, Temp. \_\_\_\_\_  $^\circ\text{C}$

### Pressure ratio:

Excess pressure \_\_\_\_\_  
 Vacuum \_\_\_\_\_

### Accessories:

Hose clamps  
 Ventilation/exhaust filters

### Other media

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_